REVISIONS				
REV	DESCRIPTION	CHK	ENG	DATE
1-a				
1-b			HU	07/18/04

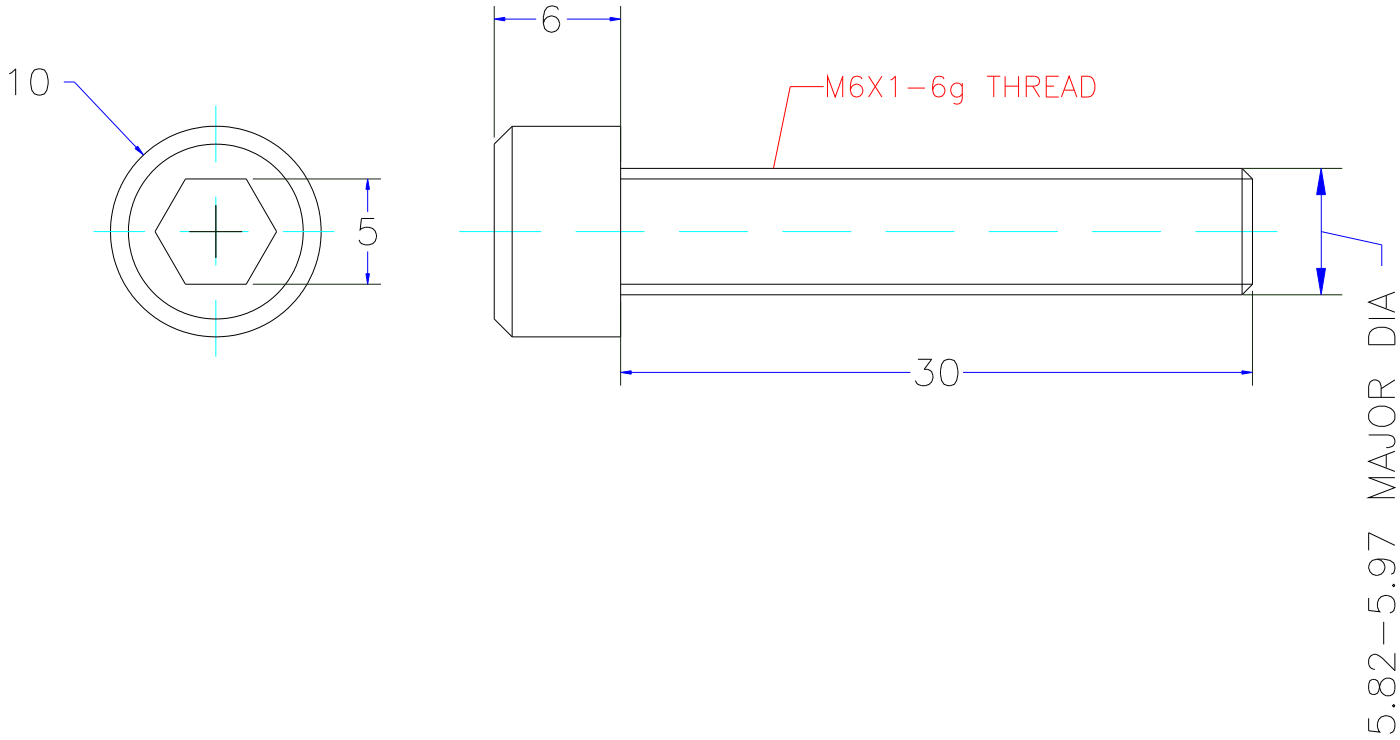

NOTES:

1. MATERIAL:STINLESS STEEL
   HEAT TREATMENT: POST PLATE THROUGH HARDENED TO HRC 20--35
2. FINISH: DULL BLACK ZINC
   PART SHALL EXHIBIT NO RED RUST AFTER 600HR
   SALT-FOG TEST PER ASTM B117.
3. Thread of parts shall be tested by "pass" gage and " reject" gage.
4. PART SHALL WITHSTAND 89 IN-LB(10 N-M)MIN.TORSIONAL STRENGTH
5. Assembly predrive torque7.0?0.02N-M

Unless otherwise specified dimensions are in millmeter. Tolerances are: Decimals Angles X. +/— +/— .X +/- 0.20 .XX+/- 0.10	THIRO ANGLE PRDJECTION	LEVEL 3	DRAFTER LIU	DATE: 12/3/02	ELDER AUDIO MANUFACTORY The Third Industrict District Wentang Dongguan Guangdong 523121 China.
	MATERIAL: See Notes	2	CHECKER		DESCRIPTION LT9702-WR H/H6X30M D=10
	FINISH: See Notes	1	ENGINEER HU	12/3/02	SIZE C / FSCM / CLASS / DWG NO.: B-LS6-01 LTMB24-II-104 / REV 1-b
			APP BY		SCALE: NONE / SHEET of

FNAME REVDATE USER