


REVISIONS			
REV	DESCRIPTION	CHK	ENG
1-a			
1-b			


			07/18/04
--	--	--	----------

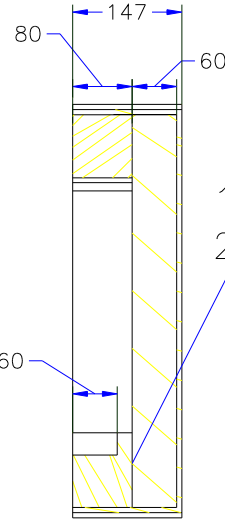

1.The whole surface glued tightly.
2.Tension damage rate for Basic Mater

1.Foam Density>30KG/M³
2.Foam Glued eachother,Tension damage rate>60%

SECTION A-A

Unless otherwise specified dimensions are in millimeter. Tolerances are: Decimals Angles X. +/- 0.20 .XX+/- 0.10	THIRD ANGLE PROJECTION		LEVEL	DRAFTER	DATE:	ELDER AUDIO MANUFACTORY				
			3	HU	12/3/08	The Third Industrial District Wenlong Dongguan Guangdong 523121 China.				
			CHECKER			DESCRIPTION PT322857-001S				
	MATERIAL: EPE		2	ENGINEER	12/3/08	9702 PP COVER, WR				
	FINISH: See Notes		1	APP BY		SIZE	FSCM	CLASS	DWG NO.:	
						C			B-ZBW-5MG21	REV 1-b
						SCALE: NONE		SHEET of		