

D

C

B

A


D

C

B


A

REVISIONS				
REV	DESCRIPTION	CHK	ENG	DATE

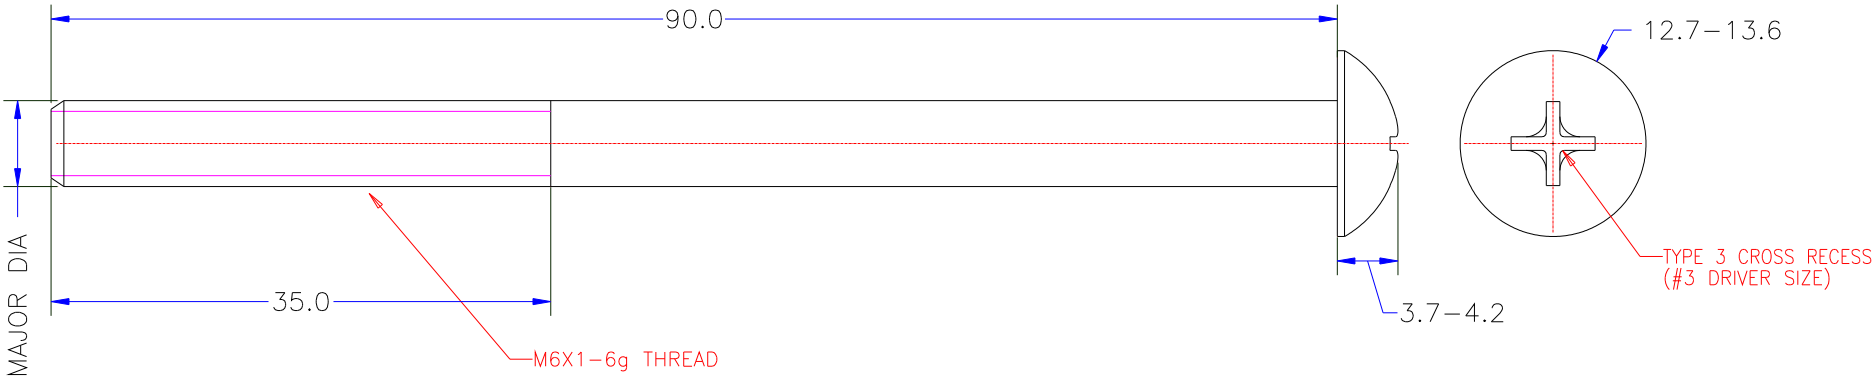

NOTES:

1. MATERIAL:STINLESS STEEL
HEAT TREATMENT: POST PLATE THROUGH HARDENED TO HRC 20--35
- 2 FINISH: DULL BLACK ZINC
PART SHALL EXHIBIT NO RED RUST AFTER 600HR
SALT-FOG TEST PER ASTM B117.
- 3 Thread of parts shall be tested by "pass" gage and " reject" gage.
- 4 PART SHALL WITHSTAND 88.5 IN-LB(10N-M)MIN.TORSIONAL STRENGTH
- 5 Assembly predrive torque2.5?0.2N-M

Unless otherwise specified dimensions are in millimeter. Tolerances are: Decimals Angles X. +/- +/- .X +/- 0.35 .XX +/- 0.10	THIRO ANGLE PROJECTION	LEVEL	DRAFTER	DATE:	ELDER AUDIO MANUFACTORY				
		3	CHECKER	09-09-08	The Third Industirct District Wenzhou Guangdong 523121 China.				
	MATERIAL:	2	ENGINEER	09-09-08	DESCRIPTION				
	See Notes				screw				
	FINISH:	1	APP BY		SIZE	FSCM	CLASS	DWG NO.:	REV
	See Notes				C			B-LS13-01	01
				SCALE: NONE		SHEET 1 of 1			

REV 01