REVISIONS				
REV	DESCRIPTION	CHK	ENG	DATE
1-a				
1-b			HU	07/18/04

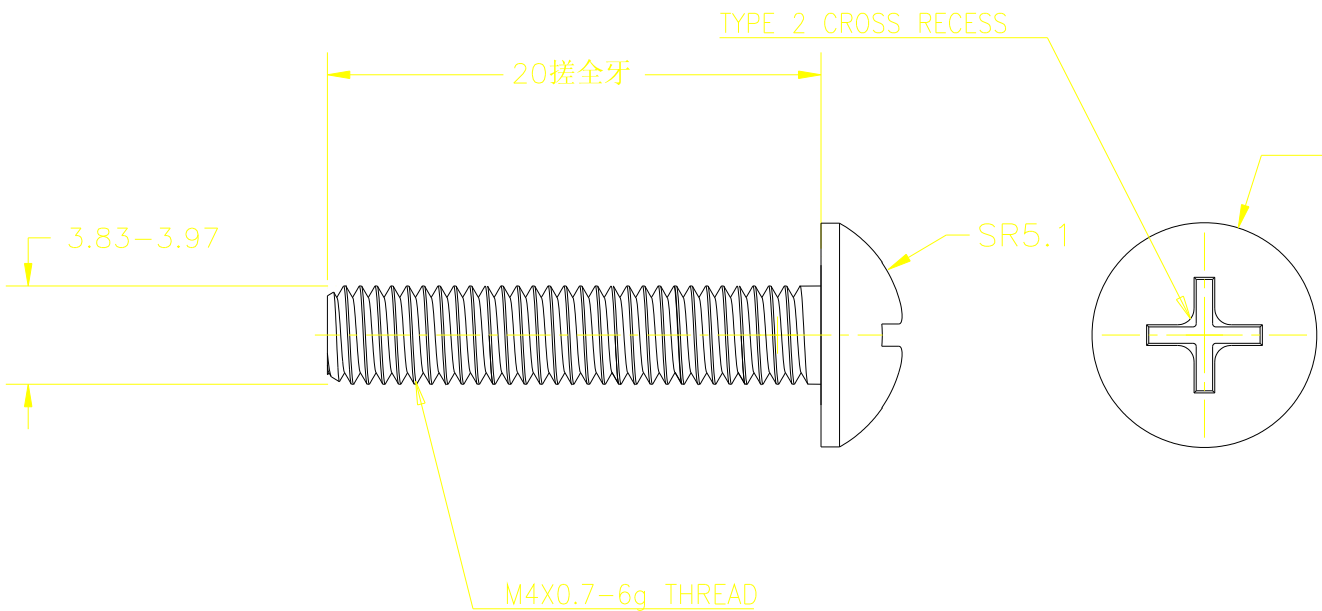

NOTES:

1. MATERIAL:STAINLESS STEEL 304
   HEAT TREATMENT: POST PLATE THROUGH HARDENED TO HRC 20--35
2 FINISH: DULL BLACK ZINC
   PART SHALL EXHIBIT NO RED RUST AFTER 600HR
   SALT-FOG TEST PER ASTM B117.
3 Thread of parts shall be tested by "pass" gage and " reject" gage.
4 PART SHALL WITHSTAND 25 IN-LB(2.8N-M)MIN.TORSIONAL STRENGTH
5 Assembly predrive torque 0.65?0.02N-M

Unless otherwise specified dimensions are in millmeter. Tolerances are: Decimals Angles X. +/— +/— .X +/- 0.20 .XX+/- 0.10	THIRD ANGLE PROJECTION	LEVEL 3	DRAFTER HU	DATE: 02/17/04	ELDER AUDIO MANUFACTORY The Third Industrict District Wentang Dongguan Guangdong 523121 China.
	MATERIAL: See Notes	2	CHECKER		DESCRIPTION BOSELT MB24-III TM4X20
	FINISH: See Notes	1	ENGINEER HU	02/17/04	SIZE C / FSCM / CLASS / DWG NO.B-LS4-01 LT_MB24-II-111 / REV 1-b
			APP BY		SCALE: NONE / SHEET of

FNAME REVDATE USER