REVISIONS				
REV	DESCRIPTION	CHK	ENG	DATE
1-a				
1-b			HU	07/18/04

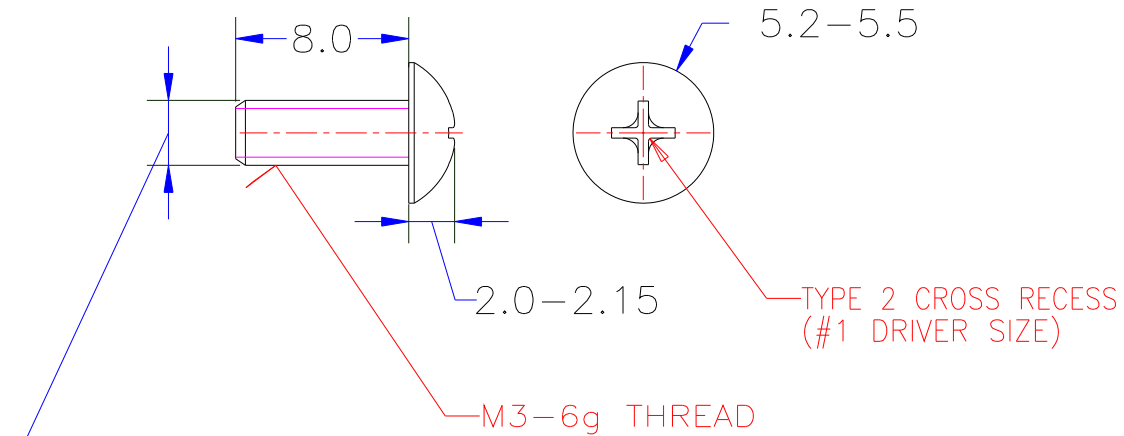

NOTES:

1. MATERIAL:STAINLESS STEEL
   HEAT TREATMENT: POST PLATE THROUGH HARDENED TO HRC 20--35
2. FINISH: DULL BLACK ZINC
   PART SHALL EXHIBIT NO RED RUST AFTER 600HR
   SALT-FOG TEST PER ASTM B117.
3. Thread of parts shall be tested by "pass" gage and " reject" gage.
4. PART SHALL WITHSTAND 14 IN-LB(1.7N-M)MIN.TORSIONAL STRENGTH
5. Assembly predrive torque 0.6?0.1N-M

Unless otherwise specified dimensions are in millmeter. Tolerances are: Decimals Angles X. +/— +/— .X +/- 0.20 .XX+/- 0.10	THIRD ANGLE PROJECTION	LEVEL 3	DRAFTER HU	DATE: 11/4/03	ELDER AUDIO MANUFACTORY The Third Industrict District Wentang Dongguan Guangdong 523121 China.
	MATERIAL: See Notes	2	CHECKER		DESCRIPTION: screw TM8X8
	FINISH: See Notes	1	ENGINEER HU	11/4/03	SIZE C / FSCM / CLASS / DWG NO.: B2-LS3-03 LT9702-II-133 / REV 1-b
			APP BY		SCALE: NONE / SHEET of

FNAME REVDATE USER